

Portable temperature and humidity test chamber


Model: BSC-WS-AB

- Range: 5 °C ~55 °C(at 20 °C) /25%RH~90%RH
- Easy operation with one key set
- Light weight, easy to carry
- With CE/Rohs certificate




Temperature range	5 °C~55 °C(@20 °C)
Humidity range	25%RH ~ 90%RH (see detail graph)
Resolution	0.01 °C/0.01%RH
Temp Deviation	≤±0.3 °C (@20 °C)
Humi Deviation	Humidity >75%RH: ≤±5%RH; Humidity <75%RH: ≤±3%RH
Temp Fluctuation	≤±0.2 ~ 0.4 °C 2/3 area
Humi Fluctuation	≤ ±1 ~ 3% RH (@20 °C) 2/3 area
Temp Uniformity	≤ 0.3 ~ 0.5 °C 2/3 area
Humi Uniformity	≤ ±2 ~ 5% RH (@20 °C) 2/3 area
Working area	300*400*300mm
Testing holes	Left side Φ80/Right side Φ50mm
Power	AC 220V 50/60HZ <1800W
Dimension	570*490*600mm
Weight	46kg

● Reference graph



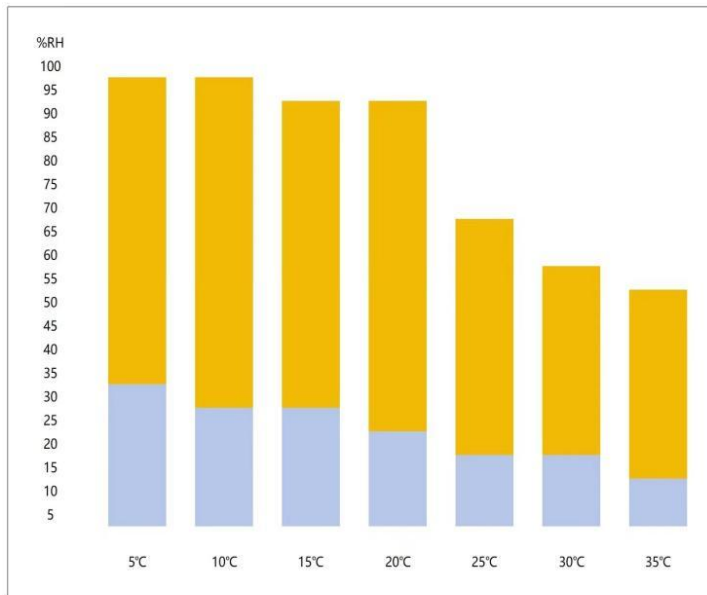


Attention: The area with orange is the effective controllable range.

● Appearance

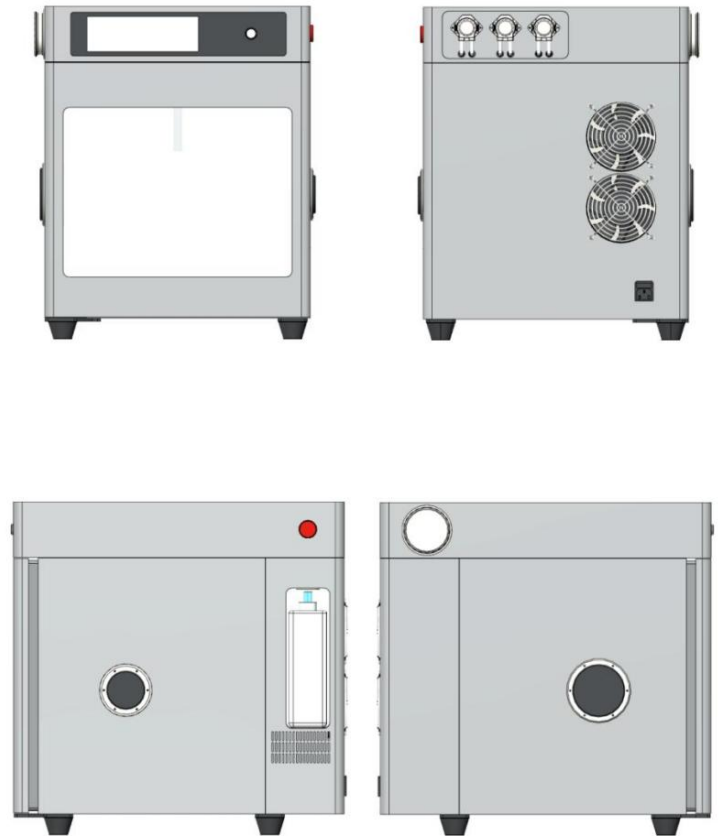

● Standard accessory



- ▶ Plug*2
- ▶ Bracket*2
- ▶ Power cable*1 (EU/USA/UK etc.)
- ▶ User manual*1
- ▶ Product catalog*1
- ▶ Notebook*1

● Working condition

- ▶ <2000m
- ▶ Room temperature: 23 °C±2