

KERN PKS 600-2

Flexible precision balance for laboratories and the pharmaceutical industry

KERN



Date of creation: 30.06.2026

Category	
Brand	KERN
Product category	Laboratory balance
Product group	Precision balance
Product family	PKS
Measuring System	
Weighing system	Strain gauge
Weighing capacity [Max]	600 g
USP Minimum weight of sample (k = 2, U = 0.1%)	20 g
Readability [d]	0,01 g
Reproducibility	0,01 g
Linearity	± 0,03 g
Resolution	60.000
Adjustment options	Adjusting with external weight
Recommended adjusting weight	600 g (F2)
Possible calibration points	100 g; 200 g; 400 g; 500 g; 600 g
Stabilization time	3 s
Eccentric loading at 1/3 [Max]	0,03 g
Construction type of the scale	Single-range balance
Units	kg
	g
	gn
	dwt
	tl (Tw)
	tl (HK)
	ozt
	tl (Singap, Malays)
	ct
	mo

	lb
	oz
Maximum creep (15 minutes)	100 mg
Maximum creep (30 minutes)	200 mg
Default unit	g

Display	
Display type	LCD graphic
Display type	LCD Graphic
Display backlight	✓
Display screen size	115×35 mm
Display segments	7
Display digit height	21 mm
Languages of the user interface	English
	Symbol language

Construction	
Dimension housing (W×D×H)	205×315×95 mm
Dimensions weighing surface (W×D)	131×131 mm
Dimensions weighing surface	131×131 mm
Material housing	plastic
Material weighing plate	stainless steel
Level indicator	✓
Levelling feet adjustable	✓
Transport safety lock - bolt torque	0,4 Nm

Functions	
PreTare function	✓
Sum memory function	✓
Recipe/summing level	Rez C (like B, plus barcode or back calculation)
Recipe weighing - number of database entries	20
Recipe weighing - number of ingredients per database entry	20
Percentage determination	✓
Density determination	✓
Tolerance weighing	✓
Tolerance weighing - type of signal	acoustically visual
Underfloor weighing	Hook (included in delivery)
Alibi memory - number of memory spaces	250.000
Function for averaging under unstable weighing conditions	✓
Capacity - Display	✓

KERN PKS 600-2



Flexible precision balance for laboratories and the pharmaceutical industry

Counting function	✓
Counting resolution (laboratory conditions)	30.000
Counting reference weight can be entered	✓
Smallest piece weight when piece counting - laboratory conditions	20 mg
Smallest piece weight when piece counting - normal conditions	200 mg
Reference quantity	5, 10, 20, 50, free, Input
Memory function	✓
Memory - total size	0,016 GB
Statistic function	✓
Auto-off interval(s) in battery mode/rechargeable battery mode	5 min
	2 min
	1 min
	30 min
	60 min
	30 sec
Auto-off interval(s) in mains power mode	selectable
Tare function	manual (multi)
Number of keys for operation	6

Interface

Interfaces	RS-232 (optional)
	Ethernet (optional)
	USB-Host/Master (optional)
	Bluetooth BLE (v4.0) (optional)
	USB-Device (optional)
	KUP
	WiFi (optional)
compatible with EasyTouch	✓

Power Supply

Supplied power supply	Power supply & battery function (battery not included)
Power supply type	Power adapter
Plug-in power supply / adapter for countries - included with the delivery	EURO
	UK
	US
	CH
Plug-in power supply / adapter for countries - optional	EURO
	UK
	US
	CH
Input voltage power supply / power [Max]	100 V - 240 V AC, 50 / 60 Hz

Power supply cable removable	removable
Input voltage device / power [Max]	5,9V, 1A
Power socket for mains adapter	Hollow plug, inside plus, Ø outside 5,5 mm, Ø inside 2,1 mm, long 13 mm
Battery / accumulator type	Li-Ion
Battery	4×1.5 V AA
Battery connection	Battery insert
Battery operating time	20 h
Battery capacity	210 mAh
Battery voltage	3 V
Battery - Number of cells	1
Battery - Individual weight	3,2 g
Battery - Total weight	3,2 g
Battery - Construction	Individual cells
Battery capacity (Wh)	0,66 Wh
Battery - Lithium content	64 mg
Battery - Tests passed UN 38.3	✓
Rechargeable battery operating time - backlight on	24 h
Rechargeable battery operating time - backlight off	48 h
Rechargeable battery charging time	8 h
Rechargeable battery optional	Rchrg. battery optional - intern

Environmental conditions

Ambient temperature [Min]	5 °C
Ambient temperature [Max]	35 °C
Humidity of environment [Max]	80 %
Storage temperature [Min]	-20 °C
Storage temperature [Max]	60 °C

Approval

CE mark	✓
---------	---

Services (optional)

Article number for DAkkS calibration	963-127
Article number for certificate of conformity	969-517

Packing & Shipping

Delivery time	1 d
Dimensions packaging (W×D×H)	400×300×200 mm
Shipping method	Parcel service

KERN PKS 600-2



Flexible precision balance for laboratories and the pharmaceutical industry

Net weight approx. 2,0 kg

Gross weight approx. 3,2 kg

Shipping weight 4,8 kg

Shipping volume weight 4,8 kg

Product information


GTIN/EAN number 4045761476486

Trade number 90160010

REACH classification no prohibited substances

Pictograms

STANDARD

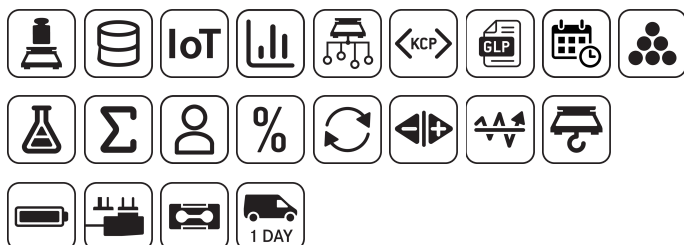

OPTION

