

# KERN 440-53N

The classic balance in the laboratory

# KERN®



## Measuring system

Adjustment options:	External calibration
Linearity:	2 g
Minimum weight (USP):	2 kg
Readability [d]:	1 g
Recommended adjusting weight:	5 kg (M2)
Repeatability:	1 g
Resolution:	6000
Stabilisation time under laboratory conditions:	2 s
Warm up time:	30 min
Weighing capacity [Max]:	6 kg
Weighing system:	Strain gauge
Weighing units:	dwt g kg lb mo oz t (HK) t (Tw) tol

## Display

Display digit height:	1,500 cm
-----------------------	----------

## Counting

Counting resolution:	3000
Minimum piece weight at piece counting (Laboratory):	2 g
Minimum piece weight at piece counting (Normal):	20 g

## Functions

Counting function:	yes
Percentage determination:	yes
Vibration-free weighing (Animal weighing program):	yes

## Environmental conditions

Maximum humidity:	80 %
Maximum operating temperature:	35 °C
Minimum ambient temperature:	5 °C

## Power supply

Battery:	9 V Block
Charging time:	10 h
Input voltage:	220 V - 240 V AC 50 Hz
Mains adapter/adaptor included:	CH EURO UK US
Operating time:	20 h
Operating time (Backlight off):	20 h
Rechargeable battery:	Rchrg. battery optional

## Service

Adjustment at the location of installation: 961-248

DAkkS Certificate:	963-128
--------------------	---------

## Category

Brand:	KERN
Category:	Balances
Product Group:	Precision balance

## Packaging & shipping


Delivery:	24 h
Dimensions packaging (WxDxH):	350 x 210 x 170 mm
Gross weight:	1,601 kg
Net weight:	1,182 kg
Shipping method:	Parcel service

## Construction

Casing material:	Plastic
Dimensions housing (WxDxH):	165 x 230 x 80 mm
Material weighing plate:	stainless steel
Weighing surface (WxD):	150 x 170 mm

## Piktogramme

### STANDARD

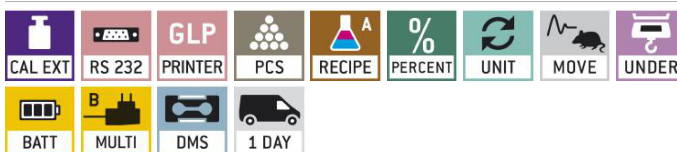

### OPTION

